

ELECTRIC PUMPS with PENDANT SWITCH


- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- 10 ft. hand held pendant switch allows user to turn on/off motor
- All pumps are single phase
- Pumps come with manual valve
- Toggle switch only turns on/off motor
- 50 Hertz motors optional



Electric pumps can be used in a variety of industrial settings



Use with Cylinder	Motor Size (hp)	Usable Oil Capacity (gal)	Model Number	Pressure Rating		Oil Output Flow Rate		Valve Type	Valve Function	Current Draw (amps)	Motor Voltage (volts)	Weight (lbs)
				1st Stage (psi)	2nd Stage (psi)	1st Stage (in ³ /min)	2nd Stage (in ³ /min)					
Single Acting	0.5	1.0	PEW0501T	350	10,000	293	18	3-way, 3-position	Advance/ Hold/ Return	9	115	59.5
	1.0	2.0	PEW1002T	700	10,000	397	37			12	115	70.5
	1.5	3.0	PEW1503T	700	10,000	476	61			17	115	88.5
	1.5	5.0	PEW1505T	700	10,000	476	61			17	115	94.0
	1.5	10.0	PEW1510T	700	10,000	476	61			17	115	116.0
	1.5	15.0	PEW1515T	700	10,000	476	61			17	115	127.0
	1.5	25.0	PEW1525T	700	10,000	476	61			17	115	148.0
	3.0	5.0	PEW3005T	700	10,000	592	110			17	230	101.0
	3.0	10.0	PEW3010T	700	10,000	592	110			17	230	123.0
	3.0	15.0	PEW3015T	700	10,000	592	110			17	230	134.0
Double Acting	0.5	1.0	PEWM0501T	350	10,000	293	18	4-way, 3-position	Advance/ Hold/ Return	9	115	59.5
	1.0	2.0	PEWM1002T	700	10,000	397	37			12	115	70.5
	1.5	3.0	PEWM1503T	700	10,000	476	61			17	115	88.5
	1.5	5.0	PEWM1505T	700	10,000	476	61			17	115	94.0
	1.5	10.0	PEWM1510T	700	10,000	476	61			17	115	116.0
	1.5	15.0	PEWM1515T	700	10,000	476	61			17	115	127.0
	1.5	25.0	PEWM1525T	700	10,000	476	61			17	115	148.0
	3.0	5.0	PEWM3005T	700	10,000	592	110			17	230	101.0
	3.0	10.0	PEWM3010T	700	10,000	592	110			17	230	123.0
	3.0	15.0	PEWM3015T	700	10,000	592	110			17	230	134.0
	3.0	25.0	PEWM3025T	700	10,000	592	110			17	230	155.0

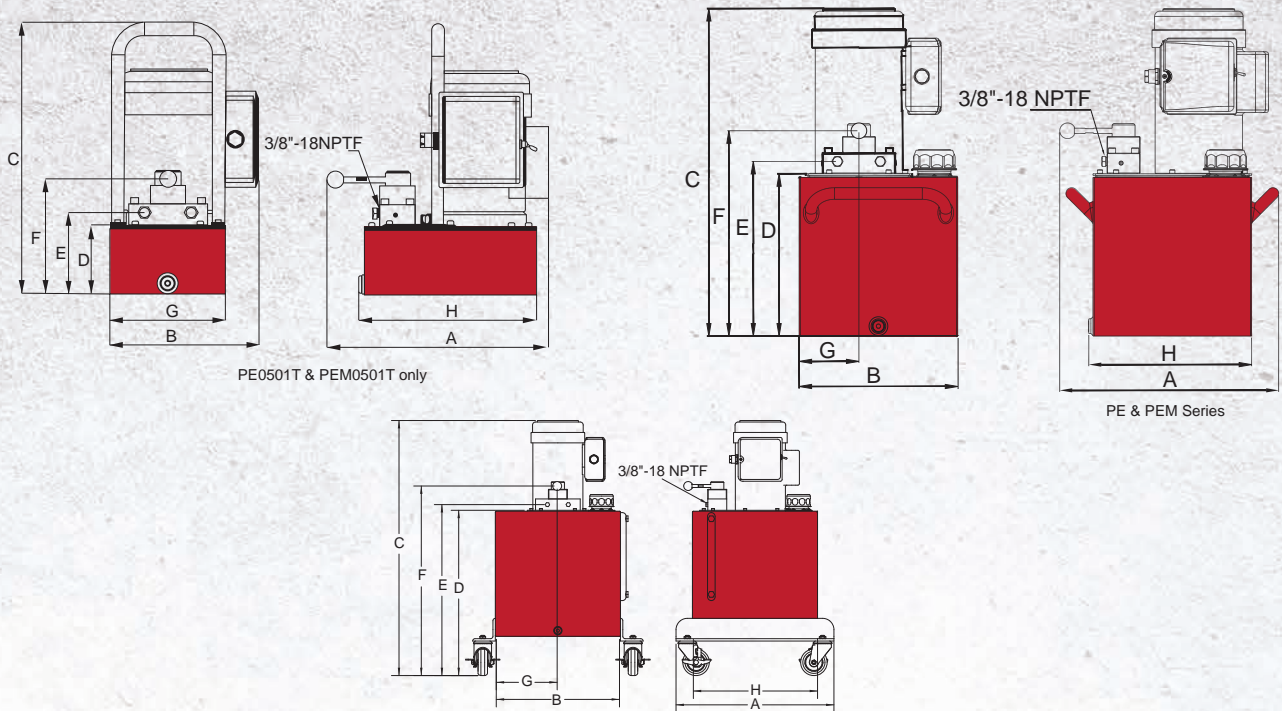

Model Number	Dimensions (in)							
	A	B	C	D	E	F	G	H
PEW0501T	14.92	10.28	19.09	4.72	5.67	7.99	8.07	12.36
PEW1002T	16.65	12.01	17.83	5.94	6.89	9.21	4.53	12.36
PEW1503T	16.65	12.01	19.72	7.24	8.19	10.51	4.53	12.36
PEW1505T	16.57	12.01	24.78	12.28	13.21	15.53	4.53	12.32
PEW1510T	20.87	16.54	31.48	18.98	19.93	22.25	8.27	16.54
PEW1515T	20.87	16.54	34.63	22.13	23.08	25.40	8.27	16.54
PEW1525T	25.59	21.26	34.63	22.13	23.08	25.40	10.63	21.26
PEW3005T	16.54	12.01	26.54	12.28	13.23	15.51	4.53	12.36
PEW3010T	20.87	16.54	33.24	18.98	19.93	22.25	8.27	16.54
PEW3015T	20.87	16.54	36.39	22.13	23.08	25.40	8.27	16.54
PEW3025T	25.59	21.26	36.39	22.13	23.08	25.40	10.63	21.26
PEWM0501T	14.92	10.28	19.09	4.72	5.67	7.99	8.07	12.36
PEWM1002T	16.65	12.01	17.83	5.94	6.89	9.21	4.53	12.36
PEWM1503T	16.65	12.01	19.72	7.24	8.19	10.51	4.53	12.36
PEWM1505T	16.57	12.01	24.78	12.28	13.21	15.53	4.53	12.32
PEWM1510T	20.87	16.54	31.48	18.98	19.93	22.25	8.27	16.54
PEWM1515T	20.87	16.54	34.63	22.13	23.08	25.40	8.27	16.54
PEWM1525T	25.59	21.26	34.63	22.13	23.08	25.40	10.63	21.26
PEWM3005T	16.54	12.01	26.54	12.28	13.23	15.51	4.53	12.36
PEWM3010T	20.87	16.54	33.24	18.98	19.93	22.25	8.27	16.54
PEWM3015T	20.87	16.54	36.39	22.13	23.08	25.40	8.27	16.54
PEWM3025T	25.59	21.26	36.39	22.13	23.08	25.40	10.63	21.26