



# SINGLE SPEED METAL HAND PUMPS



- All metal reservoirs resist cracks and leaks
- Internal pressure relief valve for overload protection
- Wireless option for pumps
- Solid metal valve release knob

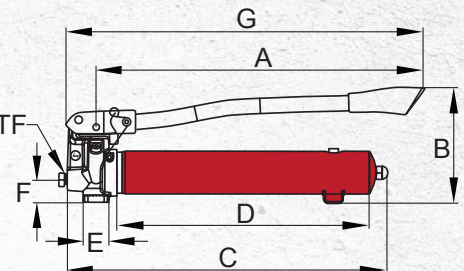

P601S

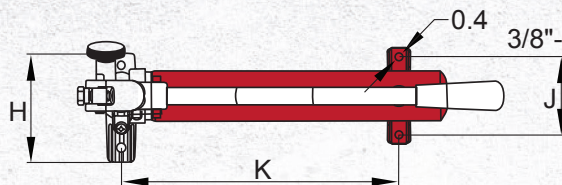

P1201S

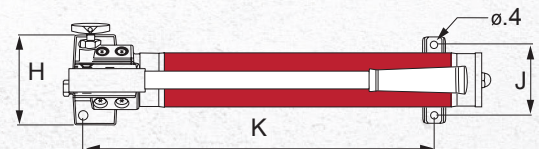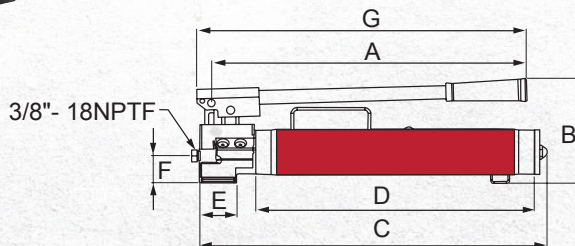

| Used with Cylinder | Pump Type    | Usable Oil Capacity (in <sup>3</sup> ) | Model Number | Pressure Rating (psi) | Oil Displacement per Stroke | Max. Operating Force (lbs) | Piston Stroke (in) | Oil Outlet Port | Weight (lbs) |
|--------------------|--------------|--|--------------|-----------------------|-----------------------------|----------------------------|--------------------|-----------------|--------------|
| Single Acting      | Single Speed | 36.5                                   | P601S        | 10,000                | 0.15                        | 109                        | 0.79               | 3/8"-18NPTF     | 13.0         |
|                    |              | 67.0                                   | P1201S       | 10,000                | 0.13                        | 89                         | 0.82               | 3/8"-18NPTF     | 20.0         |

| Model Number | Dimensions (in) |      |       |       |      |      |       |      |      |       |
|--------------|-----------------|------|-------|-------|------|------|-------|------|------|-------|
|              | A               | B    | C     | D     | E    | F    | G     | H    | J    | K     |
| P601S        | 18.94           | 6.46 | 19.53 | 15.35 | 1.57 | 1.26 | 20.79 | 5.20 | 3.74 | 14.45 |
| P1201S       | 21.73           | 6.73 | 23.07 | 3.74  | 1.06 | 1.73 | 21.73 | 5.31 | 3.74 | 18.27 |