



ALUMINUM CYLINDERS

- Lightweight aluminum alloy construction
- Up to 60 percent lighter than comparable tonnage steel cylinders
- Convenient carry handle
- Hard anodized aluminum rod provides extra protection against corrosion and wear
- Steel protective plate on cylinder base
- Maximum working pressure: 10,000 psi / 700 bar



Lightweight, yet powerful

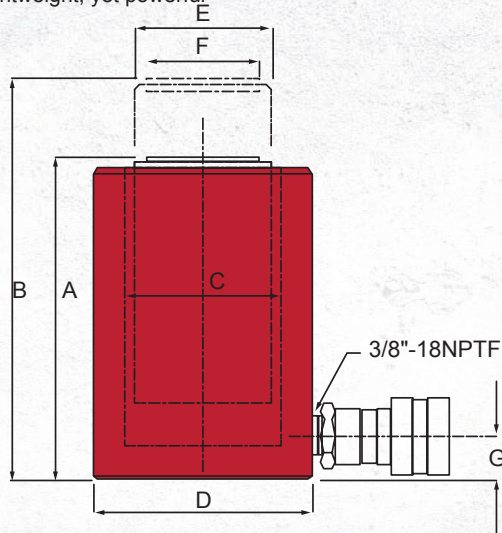

High-Flow Coupler: CH38F
Included on all models

Cylinder Capacity (tons)	Stroke (in)	Model Number	Cylinder Effective Area (in ²)	Internal Pressure at Capacity (psi)	Oil Capacity (in ³)	Collapsed Height A (in)	Extended Height B (in)	Cylinder Bore Dia. C (in)	Outside Dia. D (in)	Rod Dia. E (in)	Saddle Dia. F (in)	Base to Inlet Port G (in)	Weight (lbs)
20	1.97	HU2002T	4.83	10,000	9.51	6.85	8.82	2.48	3.35	2.00	1.56	1.08	7.4
	3.94	HU2004T	4.83	10,000	19.02	8.82	12.76	2.48	3.35	2.00	1.56	1.08	8.5
	5.91	HU2006T	4.83	10,000	28.53	10.79	16.69	2.48	3.35	2.00	1.56	1.08	9.6
30	2.00	HU3002T	6.50	9,231	13.00	6.50	8.50	2.90	4.50	2.50	2.00	1.50	11.0
	4.00	HU3004T	6.50	9,231	26.00	8.50	12.50	2.90	4.50	2.50	2.00	1.50	14.0
	6.00	HU3006T	6.50	9,231	39.00	10.50	16.50	2.90	4.50	2.50	2.00	1.50	17.0
50	2.00	HU5002T	11.00	9,091	22.00	6.50	8.50	3.70	5.50	3.10	2.50	150	17.0
	4.00	HU5004T	11.00	9,091	44.00	8.50	12.50	3.70	5.50	3.10	2.50	150	21.0
	6.00	HU5006T	11.00	9,091	66.00	10.50	16.50	3.70	5.50	3.10	2.50	150	25.0
	10.00	HU5010T	11.00	9,091	110.00	14.50	24.50	3.70	5.50	3.10	2.50	150	34.0
75	4.00	HU7504	15.00	10,000	60.00	8.50	12.50	4.40	6.50	3.90	3.00	150	29.0
	6.00	HU7506	15.00	10,000	90.00	10.50	16.50	4.40	6.50	3.90	3.00	150	35.0
100	2.00	HU10002	20.70	9,662	41.40	6.50	8.50	5.10	8.00	4.30	3.50	150	36.0
	4.00	HU10004	20.70	9,662	82.80	8.50	12.50	5.10	8.00	4.30	3.50	150	43.0
	6.00	HU10006	20.70	9,662	124.40	10.50	16.50	5.10	8.00	4.30	3.50	150	51.0
	10.00	HU10010	20.70	9,662	207.0	14.50	24.50	5.10	8.00	4.30	3.50	150	68.0